

# ProSlide® Series 2021 Belt Drive System

## BENEFITS INCLUDE:

- EPD Tested for energy efficiency
- ECO option available: U-Factor / CR / Air Leakage / SHGC / VT test data
- Two-year limited warranty
- Available in any anodized, paint or clad finish
- Accommodates slide panels up to 300 lbs.
- Attractive sightlines to complement your design
- Dual safety beams for added threshold protection
- Microprocessor control with built-in diagnostics

## FOR HIGH TRAFFIC COMMERCIAL ENTRANCE APPLICATIONS

This EPD compliant heavy duty belt drive door system is engineered to provide long life and quiet operation in a high traffic environment. Exclusive standard system features:

- Heavy duty drive-train tested to 1,000,000 cycles with a standard two-year limited warranty
- Tested to: NFRC 100/200/300 and ASTM 283E
- Standard sizes 7' to 16' width by 7' 6" height
- Adjustable astragal with double weatherseal captured in door panel extrusion. This ensures lasting and superior weatherseal.
- Durable 4.5" X 7" header
- Manual operation in case of power failure

EPD COMPLIANT




## CUSTOM APPLICATIONS & OPTIONS

- Transom with glass division
- Additional horizontal rails & vertical stiles
- Narrow, medium & wide stile construction
- Glass stops for 1/4" to 1" glazing


# ProSlide® Series 2021 Belt Drive System

Door units are typically actuated with header mounted sensor at interior & exterior. Door closes after time delay expires. Remote control or security system actuation is available.

## Installation and Operation

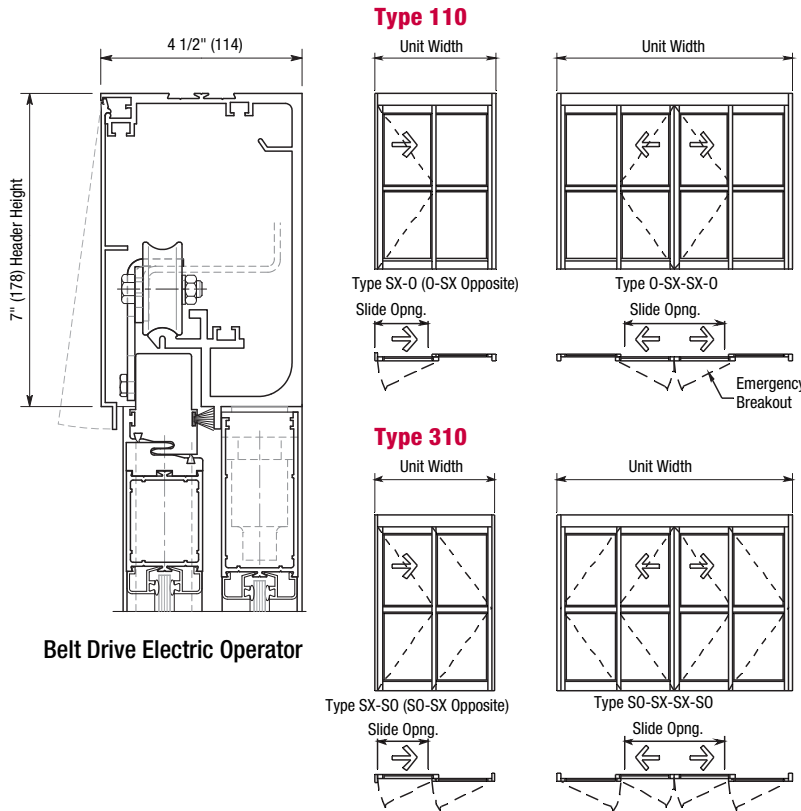

## Construction



### Corner Block Design

Exclusive mortise-style corner block construction is far superior to mass produced panels with thru-bolt construction.



### Breakaway Slide Panels

Compliant with NFPA 101 & ANSI A156.10

## Electrical Requirements:

120, 220 VAC, 50 - 60 Hz, single phase, 15 amp service. Current draw - 3.15 amps.

Specify Horton and demand AAADM certified installation



## Selection Guide

Model	Type	Unit Width	Max. Slide Opening*	Breakout Opening	
				Type 110	Type 310
ProSlide® Series 2021	Single Slide	7'	35.9"	39.5"	76.50"
		8'	41.9"	45.5"	88.50"
		8' 6"	44.9"	48.5"	94.50"
		9'	46.9"	51.5"	100.50"
	Bipart	8'	37.5"	44.9"	84"
		9'	43.5"	50.9"	96"
		10'	49.5"	56.9"	108"
		12'	61.5"	68.9"	132"
		14'	73.5"	80.9"	156"
		16'	85.5"	92.9"	180"

\*Narrow Stile Construction



### Horton Pedestrian Access Solutions

- Horton Automatics®
- FLEX™ by Horton
- Door Services Corporation®
- Won-Door®

### Horton Automatics

World Headquarters  
 4242 Baldwin Boulevard  
 Corpus Christi, Texas 78405-3399 USA  
 Phone: 800-531-3111, 361-888-5591  
 Fax: 361-888-6510

[www.hortondoors.com](http://www.hortondoors.com)

## Overhead Door Corporation

A Sanwa Holdings Company

